


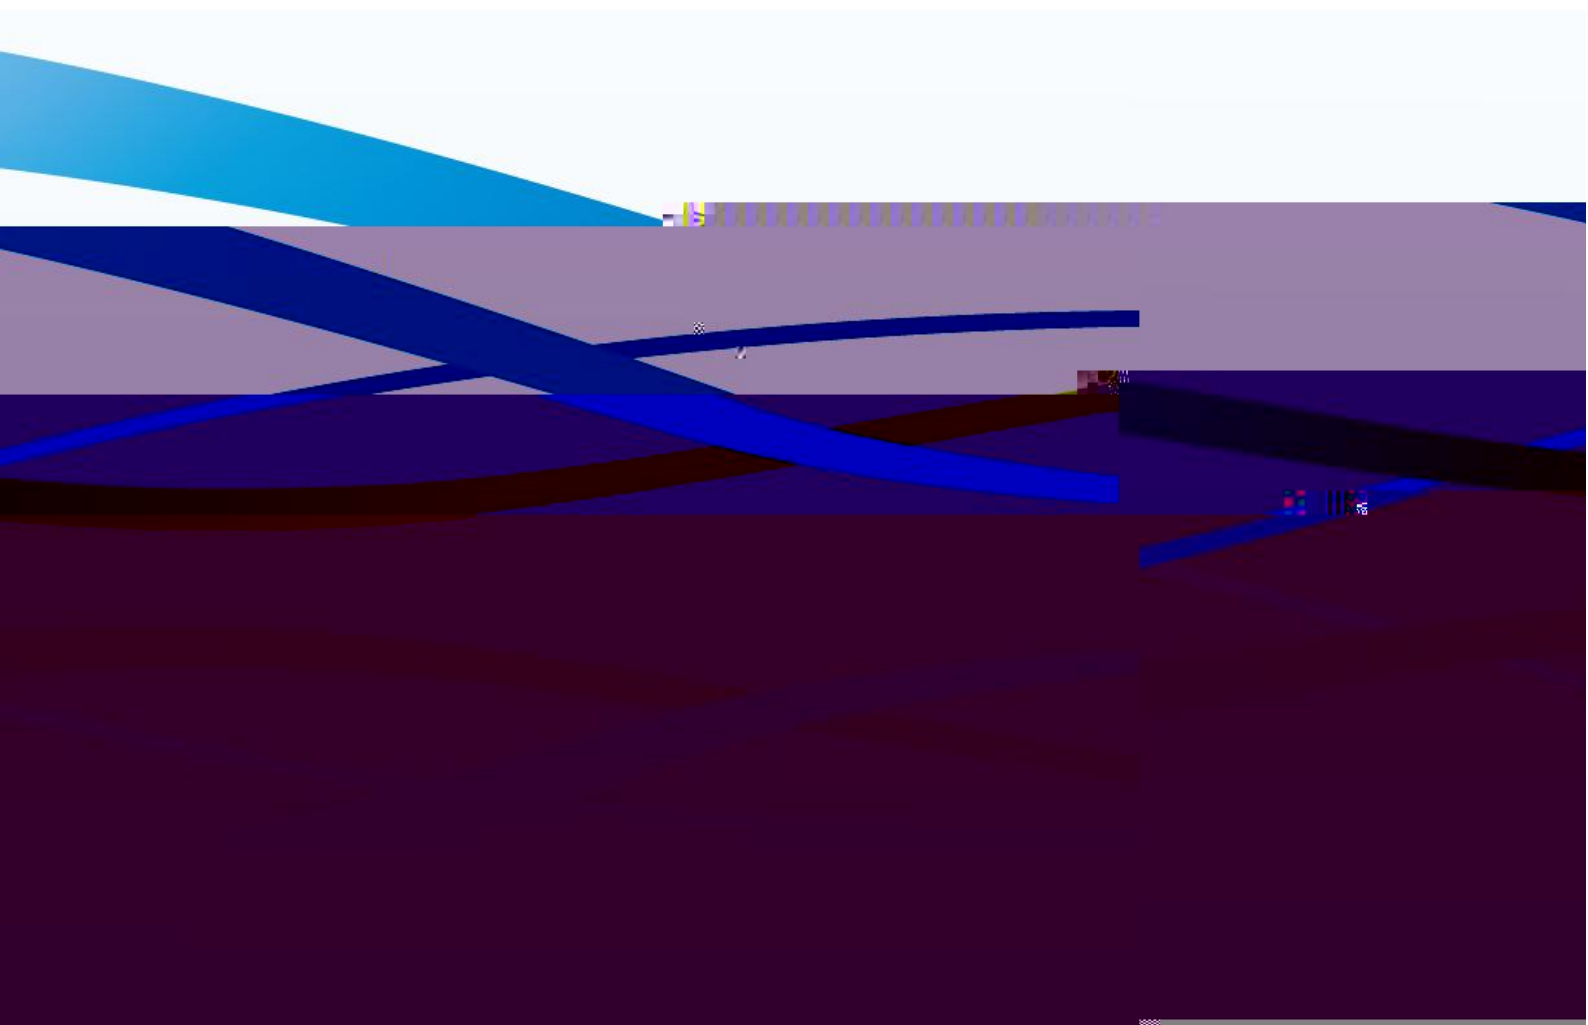

		1	
4		1	
4		2	
4		4	
4	4		6

4

10kV

10kV

4

4

4

10kV

Ш

4

4

RS232

RS485

Ш

GB/T 17215.322-2008

0.5S

GB/T 17215.323-2008

2

DL/T634.5101-2002

A-1

FTU	FTU
DTU	DTU



4

2.1

FTU
W

DC24V , DTU

DC48V

2.2

3 § 100VШ

2.2

1A 4 5AШ

2.3

1.2 $\mathbb{W}$

2.4

50Hz Ⅲ B

2.5

0.5S 2 Ш

2.6

B-1, B-2Ш

B-1 FTU

V

A

3 § 100

1.2

100000

FTU

2.7.1

		/	Ш
Ч	LED	Ш	
		Ш	
		80ms ¥ 16ms	Ш
100k á		Ш	

2.7.2 RS232/RS485

RS232/RS485	Ш
RS232/RS485	1200bps Ч 2400bps Ч 4800bps Ч
9600bps 19200bps	9600bps Ш

2.7.3

- 1) FTU
 - 24V
 - DC24V Ш
 - DC18V~DC36V , 5% Ш
 - Ш
 - FTU 2W Ш
- 2) DTU
 - DC48V Ш
 - DC18V~DC72V 5% Ш
 - Ш
 - DTU 3W Ш

4

3.1

4

4

Ш

4

4

4

4

4

Ш

Ш

3.2

0.01Ш

50

0 4



3 山
3.6

96 山

62 山

7 山

山 24 山

24

山

DL/T 634.5101 | 2002 o 山

4 4

FTU





8


8



4

4


Ш

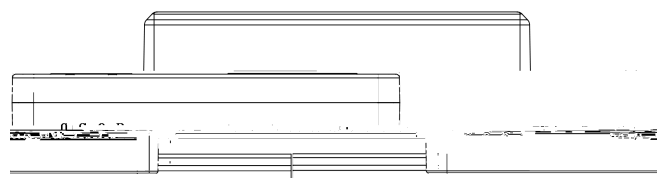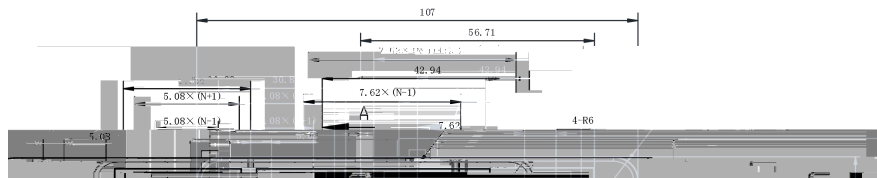

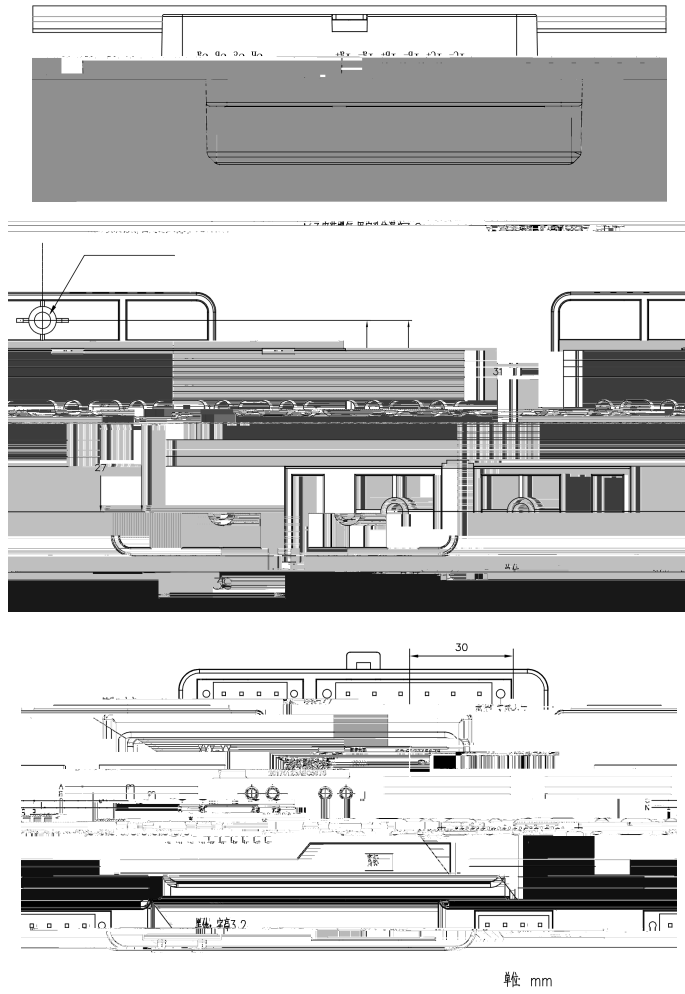

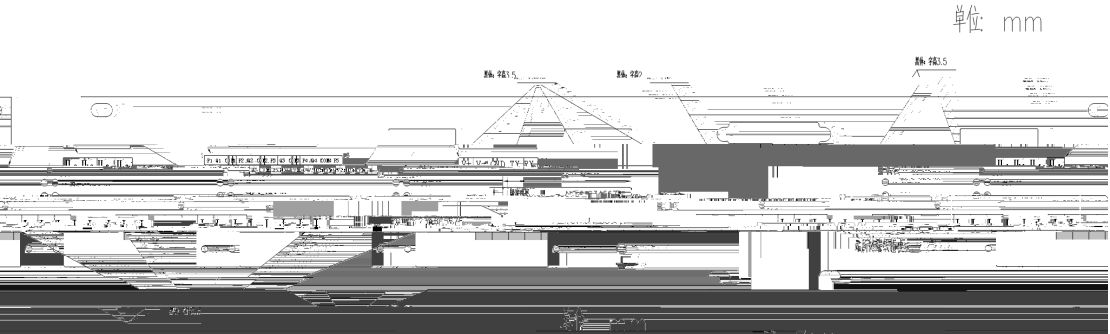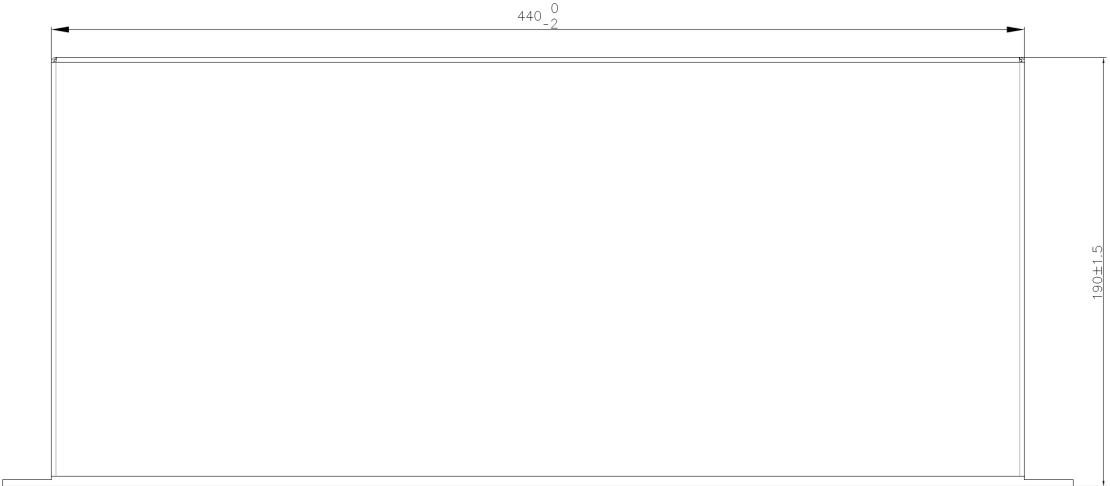

		4	46	48	2	4	DC24V 4RS232/RS485
	DB25						4 46 48
		4			4		
W							
	JP12				5.08		4
	5.08				5		DB25
	D-1W						
D-1					DTU		

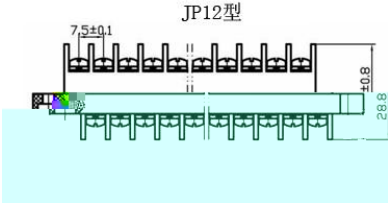1~ 2					
1	Ia1	1A	RVVP2.5m m		
2	Ib1	1B	RVVP2.5m m		
3	Ic1	1C	RVVP2.5m m		
4	In1	1	RVVP2.5m m		

5	Ia2	2A	RVVP2.5m m
6	Ib		

24	COM8	8	RVVP0.2m m		
25	S		RVVP0.2m m		